

KP128xx DATASHEET

The **C.A. Designs** keypad **KP128xx** is a multi-key (up to 128) customisable keypad, suitable for use within financial dealing environments for foreign exchange trading. It is customised using single, double sized, and quad sized keys. A blanking key is also available for creating gaps to improve the layout.

The innovative design is mechanically robust and particularly resistant to fluid spills and EMC radiation. The unit is fully compliant with UL, FCC and CE standards.

Communications interfaces - Device/Host PC

RS232 - This is a serial protocol device connected to the host PC by using a COM port with a 9 way connector. Line speed is 4800 bps.

USB Serial - This is similar to above, except that it uses USB to make the serial connection.

PS/2 - This is a standard PC keyboard type interface using a mini DIN plug. The PC uses the keypad as if it was a standard keyboard.

USB HID - This is a standard USB type keyboard interface. The PC uses the keypad as if it was a standard keyboard.


USB Stream - This is a USB type interface, but the keypad is not recognised by Windows, and custom software is used to communicate with the keypad. This is ideal for cases where the PC has a keypad and still has a standard keyboard, so that the keypad and keyboard cannot conflict. It is also ideal where several different keypads are connected to the same PC.

Audible Alert

The device provides an audible alert capability from a sounder contained inside the keypad. The sounder beeps whenever a key is pressed to provide audible feedback, however this can be switched off if required. The PC may additionally produce sounds from the keypad by controlling the frequency and duration of the sounder.

Power is derived from the computer and no additional connections are required.

Typical Connection

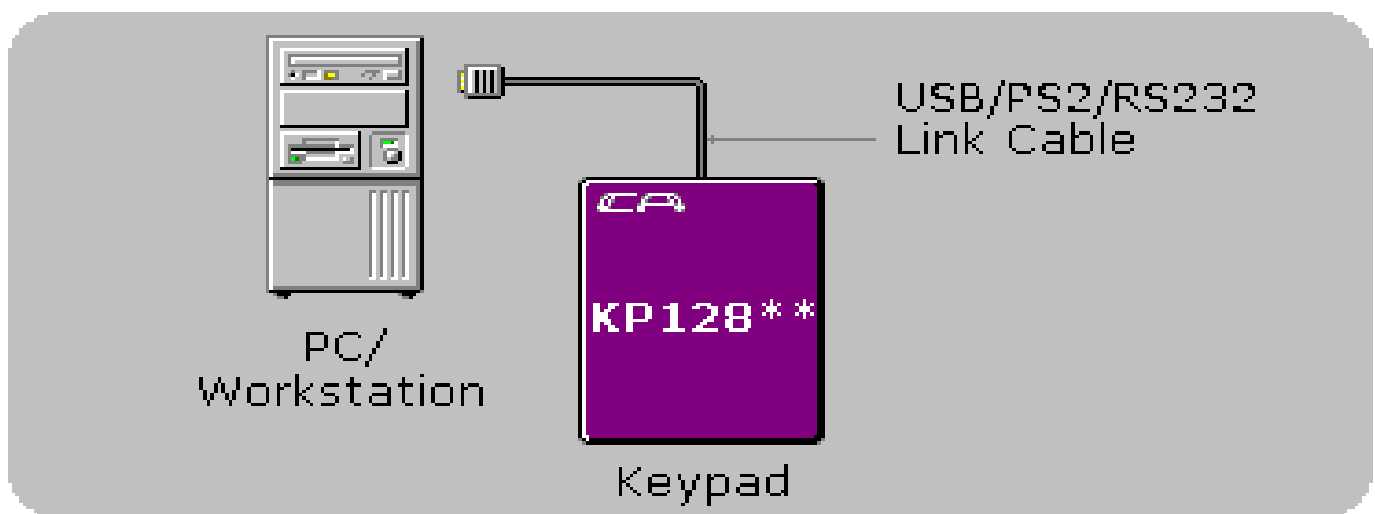

Example configurations

